

3511

Efficient sewing unit
for run-stitching small parts




PFAFF 3511

Applications:

For simultaneous run-stitching and trimming small parts such as flaps, waistband extensions, shoulder flaps, cuffs etc. Collars may also be processed. Please submit sewing sample.

Advantages:

- Head PFAFF 1183-731-900 (standard trimming margin 5.0 mm)
 - Constant seam quality with the use of jigs
 - Simple operation, short training times
 - Automatic application of fullness
 - Simple change to another size or a different article
 - Free seam programming directly on the machine
 - Overlapping production method with the use of the sequence control unit
 - Existing sewing jigs from the PFAFF 9083 can be used.
 - An attractive feature of the PFAFF 3511 is the outstanding price-performance ratio
-
- High output owing to the fully overlapped work method with the use of two sewing jigs. During the sewing operation another workpiece can already be placed in a second jig

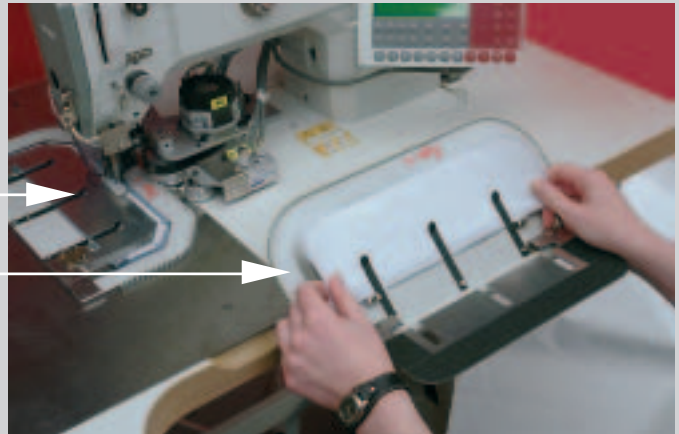

- The PFAFF 3511 is equipped with the new S3 control panel, which makes it possible to transfer data with a standard SD-card. In this way sewing programs can be transferred to other machines, or software can be updated





Optional equipment:

Basic kit for production of a sewing jig for run-stitching flaps

→ Item number: 95-300 320-70

1 sewing jig for flaps, waistband extensions and cuffs

→ Item number: 95-300 324-70

1 sewing jig for shoulder flaps

→ Item number: 95-300 325-70

1 sewing jig for collars

→ Item number: 95-300 326-70

When ordering sewing jigs, one completed sample and approx. 20 cuttings are required!

1 standard SD card with box

→ Item number: 71-8900 0014

Is required when ordering sewing jigs on a data carrier!

Needleplate for trimming margin 3.5 mm

→ Item number: 91-150 890-03/001

Specifications:

Stitch type:

301 (lockstitch)

Power supply:

230 V, 50/60 Hz

Needle system:

134 KK

Max. output:

400 VA

Needle size in $\frac{1}{100}$ mm:

80-100

Working air pressure:

6 bar

Max. stitch length:

3.5 mm

Air consumption:

15 l/work cycle

Max. speed:

3000 s.p.m

Net weight:

approx. 105 kg

**Trimming margin
(depends on version)**

3.5 or 5.0 mm

Gross weight:

approx. 176 kg

Bed-plate dimensions:

476 x 177 mm

Dimensions of machine:

Length: approx. 1250 mm

Width: approx. 800 mm

Height: approx. 300 mm
(above table)

This machine is equipped with finger-guard,
belt- and take-up lever guards as standard.

Hotlines:

Technical service: +49-175/2243-101

Application consultancy: +49-175/2243-102

Spare-parts hotline: +49-175/2243-103



Europäische Union
Wachstum durch Innovation – EFRE



**PFAFF Industriesysteme
und Maschinen AG**

Hans-Geiger-Str. 12 – IG Nord
D-67661 Kaiserslautern

Telefon: +49-631/200-0

Telefax: +49-631/17202

E-mail: info@pfaff-industrial.com

Printed in Germany
engl.
296-12-19029 02/07