

Excellence in seaming



## **2521** Premium

Single-needle lockstitch special high-speed seamer with needle feed, wheel feed and roller presser (differentiable)

# PFAFF 2521

## Features:

- Exact stitch lengths, reproducible at any time
- No or highly reduced marking thanks to the material-protecting transport mode (particularly with the finest materials or laminates)
- Exceptionally precise material transport via an independent drive of roller presser and wheel feed
- No "perforation" of material due to "stitch in stitch" backtacking
- Switch to differential transport without a sewing stop on various seam distances
- Knee switch for quick change of sewing sections
- Easy programming of seam distances
- Easy sewing of small, tight radii thanks to small contact of the sewing parts
- Panel with multi-function buttons and & programmable multi-switch
- Integrated LED light, dimmable
- Second thread tension, shiftable

## Areas of Application:

- Shoes and leather goods: Assembly- and top-stitching seams
- Automotive interior: Sewing of stub seams (e.g. cockpit)



Easy handling of control panel BDF-S3 with integrated data reader (SD-card) for transferring sewing programs and machine software




Bobbin winder equipped with an aid for a secure and fast start of the bobbin winding process and within easy reach of the operator („winding assistant“)



New:  
 Stub seams on finest materials and  
 tightest radii with the PFAFF 2521  
 + edge trimmer < 1,2 mm



- Control panel with the functions:
- Reverse sewing/intermediate backtacks
  - Needle position (without trimming)
  - Switch-on of the second pre-selected thread tension
  - Backtick supression
  - Half stitch length
  - Full stitch length
  - Saftey switch (red button)

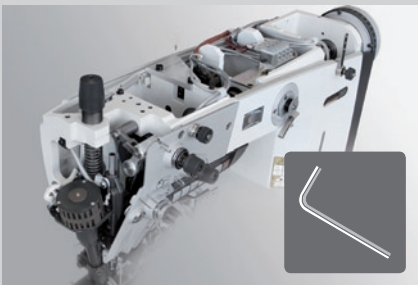

Unique service concept:  
 Easy and fast access to all adjustments. The  
 top arm cover and the head cover can be  
 removed after loosening just 3 screws

## Technical data:

- Stitch type: 301 lockstitch
- Sewing speed: max. 3,500 s.p.m
- Stitch length: max. 5 mm
- Large vertical hook: 26 mm Ø for thread sizes up to 10/3
- Options: - bobbin monitoring via sensor  
- edge trimmer



**PFAFF Industriesysteme  
und Maschinen AG**

Hans-Geiger-Str. 12 – IG Nord  
D-67661 Kaiserslautern

Telefon: +49-6301/3205-0  
Telefax: +49-6301/3205-3171  
E-mail: [info@pfaff-industrial.com](mailto:info@pfaff-industrial.com)